


Motorized Curtain Track

Progress 25/50

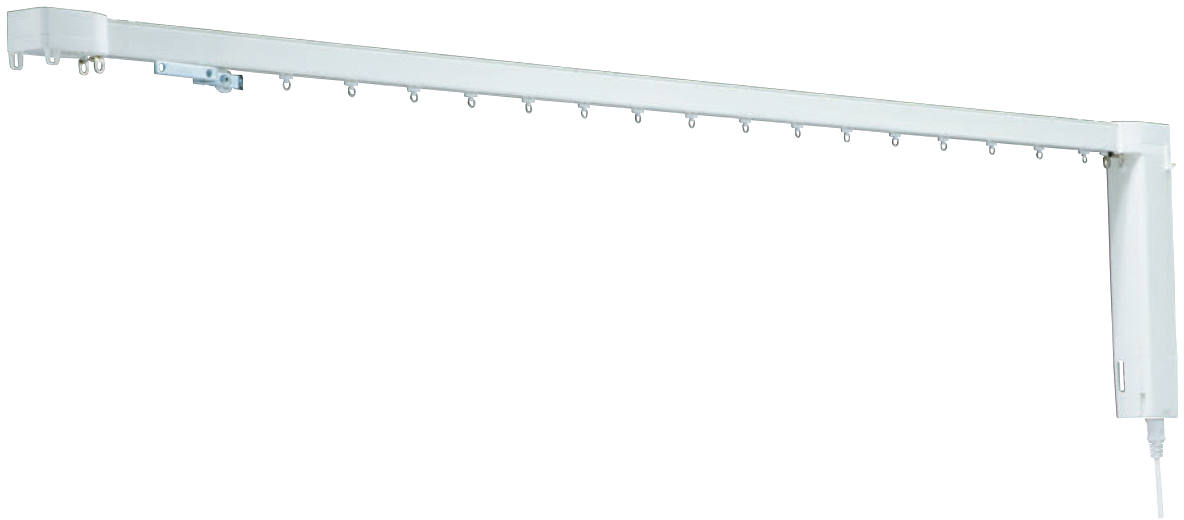

- Motorized curtain track with ultra-quiet operation.
- Automatically identifies and set Open and Stop operation limits.
- Manual-override (by hand-draw operation) is possible.
- FM remote control is available.
- Enables opening/closing of curtains without using any switch operations. (Touch Motion)

Progress 25/50

Progress 25/50's Unique Features

Feature 1: Quiet operation with a new motor and new rollers

The new motor and rollers provide ultra-quiet operation.

Feature 2: Can be curved into a variety of shapes

L-shaped, U-shaped, S-shaped and gradual curves.

Feature 3: Hand-draw operation as well as motor operation

A built-in electromagnetic clutch allows the drapery to be drawn by hand.

Feature 4: Highly durable belt drive transmission system

The belt drive transmission system is highly durable.

Feature 5: "Slow start" and "slow stop" functions

These functions enable the smooth start and stop of drapery operation.

Feature 6: Adjustable curtain open/close speed

The speed of operation is adjustable in 10 stages (from 4.5 to 9.5 seconds per meter). This allows you to select the speed that best matches each window.

Feature 7: Touch motion function


The touch motion function can perform opening/closing of curtains without using any switch.

If curtain is drawn, it will begin to move in the direction itself, and will stop at the place on limit setup.




Product Overall View and Names of Parts

Progress 25/50

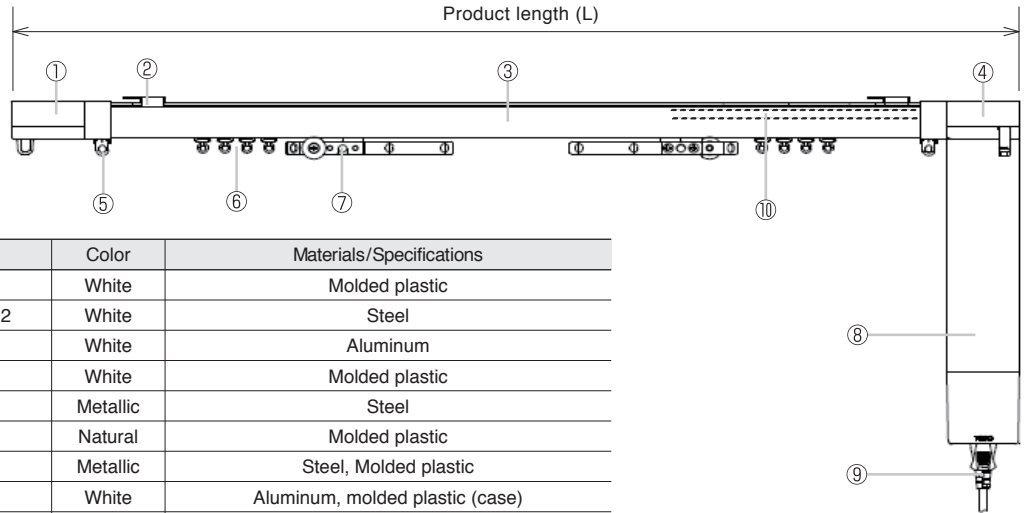


No.	Product Name	Color	Materials/Specifications
①	End side Pulley	White	Molded plastic
②	Ceiling Single Bracket M2	White	Steel
③	Track	White	Aluminum
④	Motor side Pulley	White	Molded plastic
⑤	Stop	Metallic	Steel
⑥	Noiseless Roller	Natural	Molded plastic
⑦	Pilot Roller Set	Metallic	Steel, Molded plastic
⑧	Motor	White	Aluminum, molded plastic (case)
⑨	Electric Cord with the ground	White	Wire with plug (1 m/39")
⑩	Drive Belt	Green	3-layer structure of steel wires, plastic and fiber

Rail Cross Section



Installation Dimensions

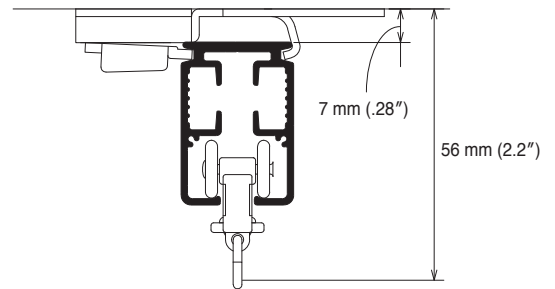

Motor Specifications

	Progress 25	Progress 50
Rated power voltage	AC 100 to 240 V	
Rated power frequency	50/60 Hz	
Power consumption	During stand by: 15 W or lower Max. load operation: 86 W	
Operating voltage	DC 24 V	
Operating current	3 mA	
Power rating	0.48 A	
Operating speed	5 to 10 sec./m (variable in 10 stages)	4.5 to 9.5 sec./m (variable in 10 stages)
Rated current	0.59 N.m	0.98 N.m
Ambient temperature	0 to 50°C (non-condensing)	
Time rating	5 min. (continuous operation)	
Noise level	43 dB (in default motor speed)	



Applicable Range

Specifications			Progress 25		Progress 50	
			Curtain Weight ^{*5}	Product Length	Curtain Weight ^{*5}	Product Length
Straight		One-way Draw	25 kg (55 lb)	1,000 mm (39") to 10,000 mm (394")	50 kg (110 lb)	1,000 mm (39") to 10,000 mm (394")
		Two-way Draw	25 kg (55 lb) [One-way Draw: 12 kg (26.4 lb)]		50 kg (110 lb) [One-way Draw: 25 kg (55 lb)]	
Single ^{*1} Curve		One-way Draw	15 kg (33 lb)	1,200 mm (47") to 10,000 mm (394")	35 kg (77 lb)	1,200 mm (47") to 10,000 mm (394")
		Two-way Draw	15 kg (33 lb) [One-way Draw: 7 kg (15.4 lb)]		35 kg (77 lb) [One-way Draw: 17 kg (37.5 lb)]	
Two Curves ^{*2} (U-shaped or S-shaped)		One-way Draw	15 kg (33 lb)	1,500 mm (59") to 6,000 mm (236")	25 kg (55 lb)	1,500 mm (59") to 10,000 mm (394")
		Two-way Draw	15 kg (33 lb) [One-way Draw: 7 kg (15.4 lb)]		25 kg (55 lb) [One-way Draw: 12 kg (26.5 lb)]	
Overall Curve Half ^{*3}		One-way Draw	15 kg (33 lb)	1,000 mm (39") to 6,000 mm (236")	25 kg (55 lb)	1,000 mm (39") to 7,000 mm (276")
		Two-way Draw	15 kg (33 lb) [One-way Draw: 7 kg (15.4 lb)]		25 kg (55 lb) [One-way Draw: 12 kg (26.5 lb)]	

^{*1} With regular curve radius of 300R (11.8"R) or 400R (16"R), curve bending is available in the range of 90° to 179°.


^{*2} With regular curve radius of 300R (11.8"R) or 400R (16"R), curve bending is available in the range of 90° to 179°.

^{*3} Overall curve half is available with a curve radius of 1,000R (39"R) or more. The number of splice is one piece only, and two tracks need to be spliced in the center.

^{*4} A splice between two curves requires at least 400 mm (16") of a straight portion, and a non-splice between two curves requires at least 200 mm (7.9") of a straight portion.


^{*5} An allowable curtain load per roller is 1.5 kg (3.3 lb) or less.

Product Size (Pilot Roller with Arm)

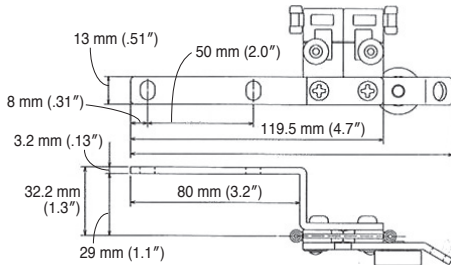


Installation Dimensions and Diagram



One-way draw: ceiling single attachment

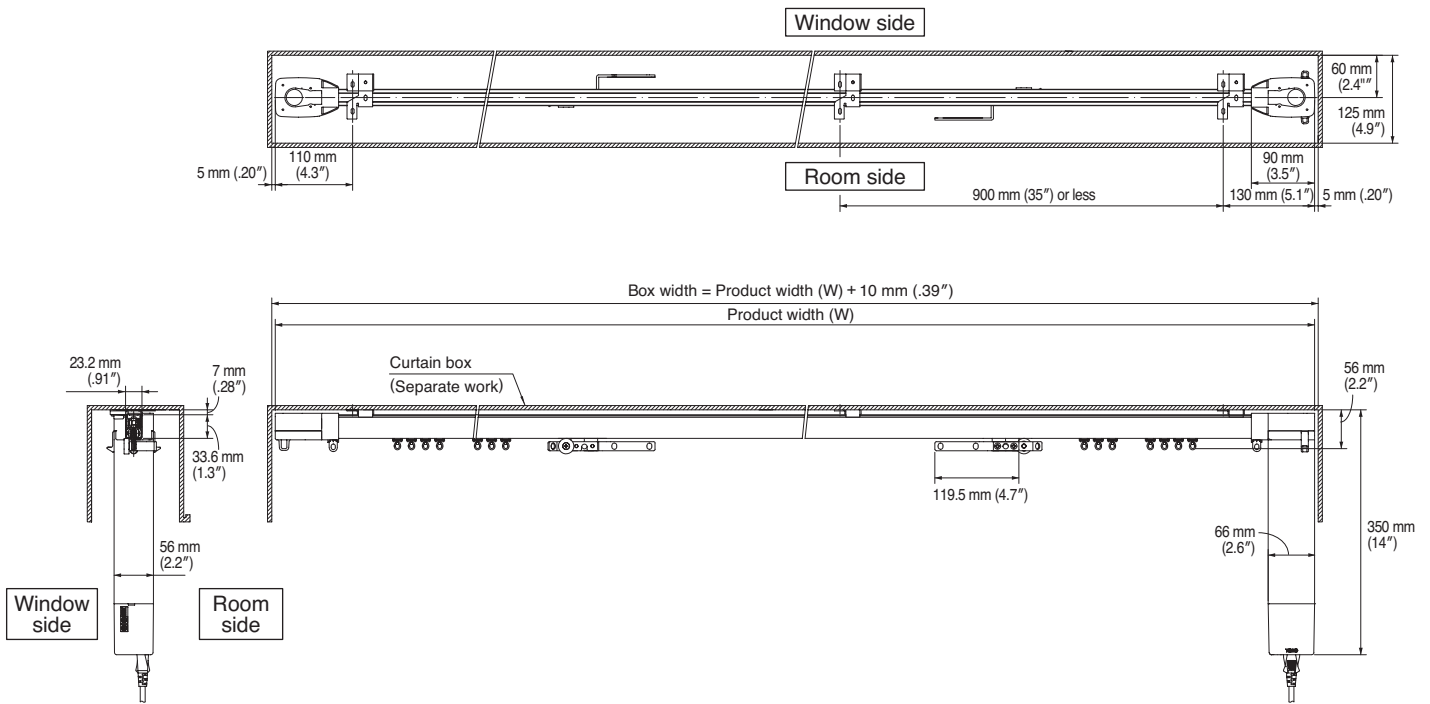



Two-way draw: ceiling double attachment

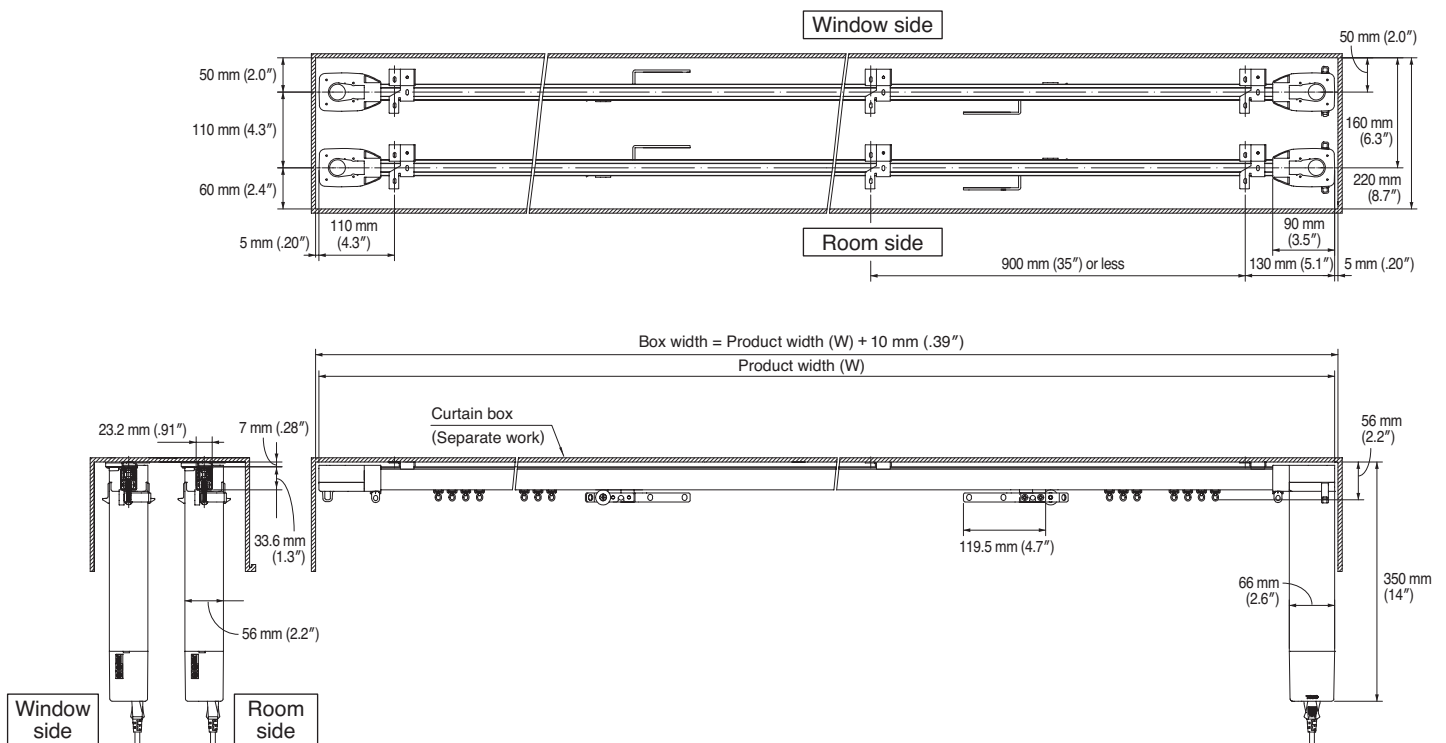


Two-way draw: ceiling single attachment
(Overlap rail)

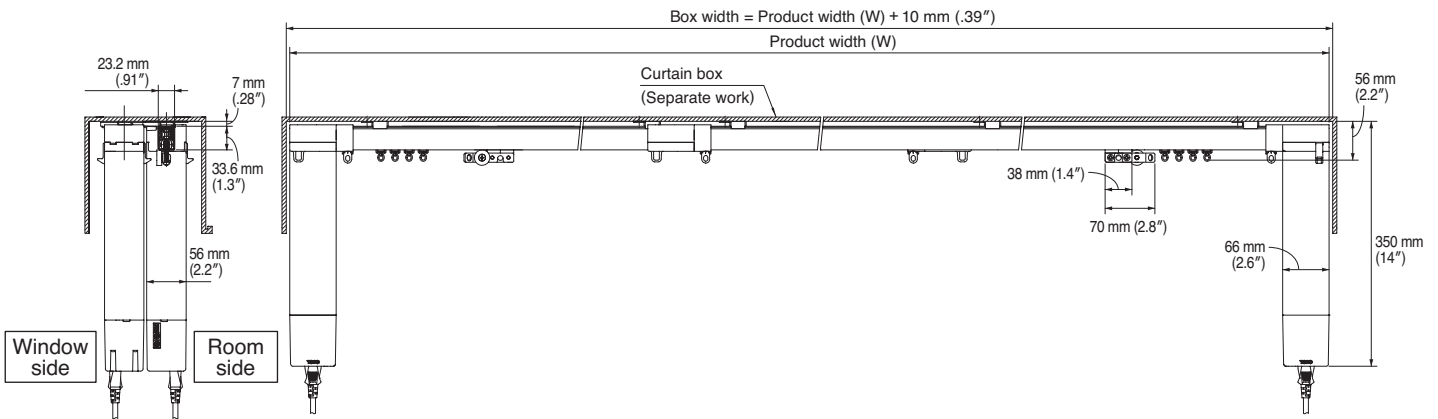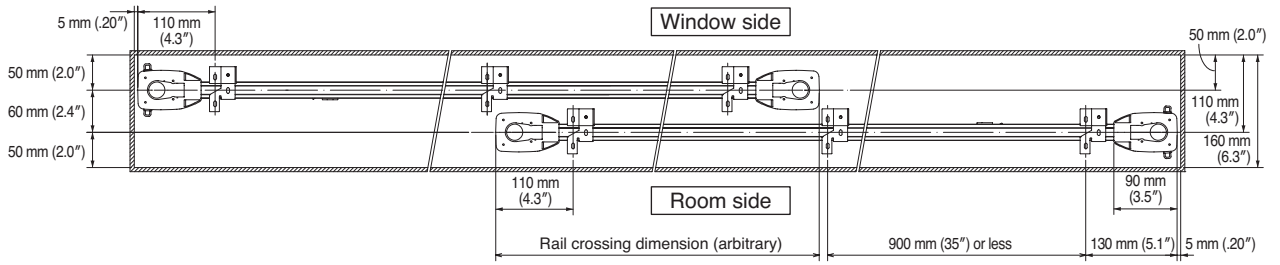


Two-way draw: ceiling double attachment
(Room side: Overlap with two rails, Window side: Master roller)

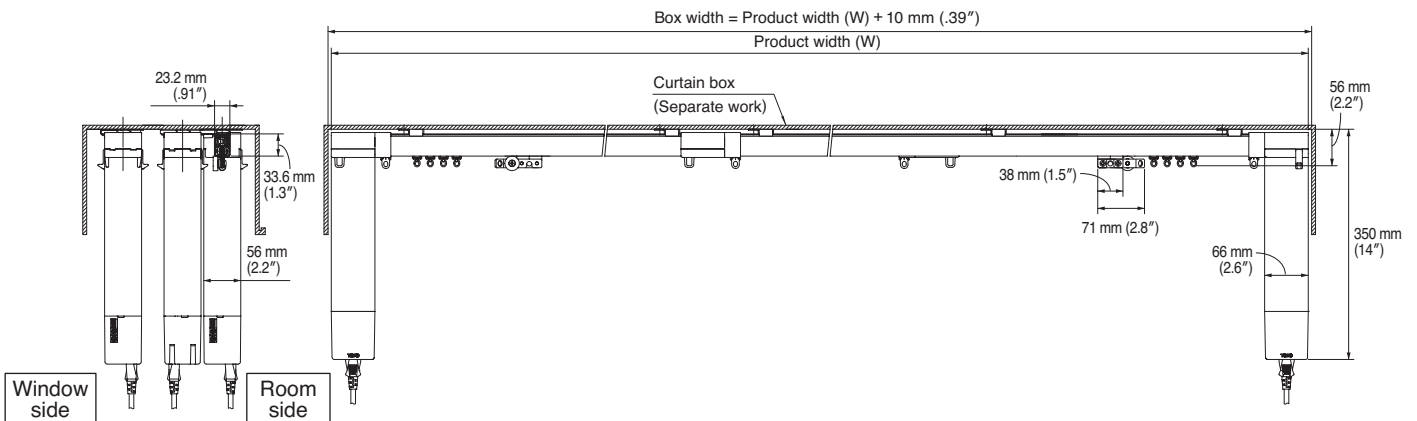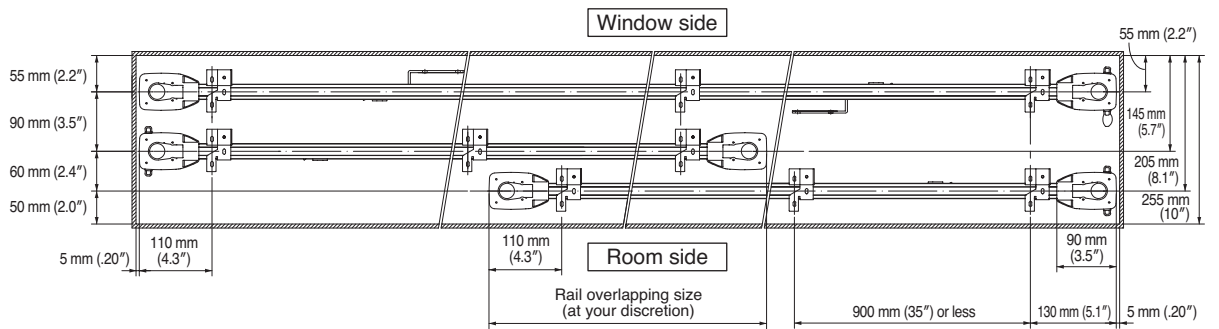


Single curve: ceiling single attachment

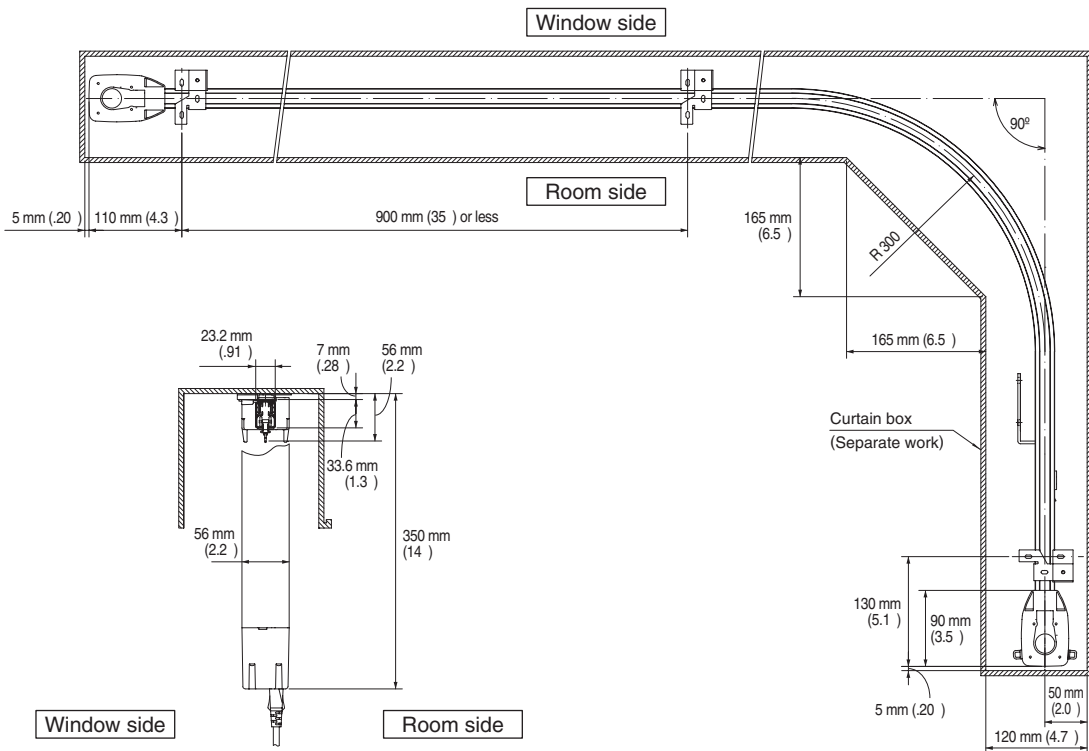


Single curve: ceiling double attachment

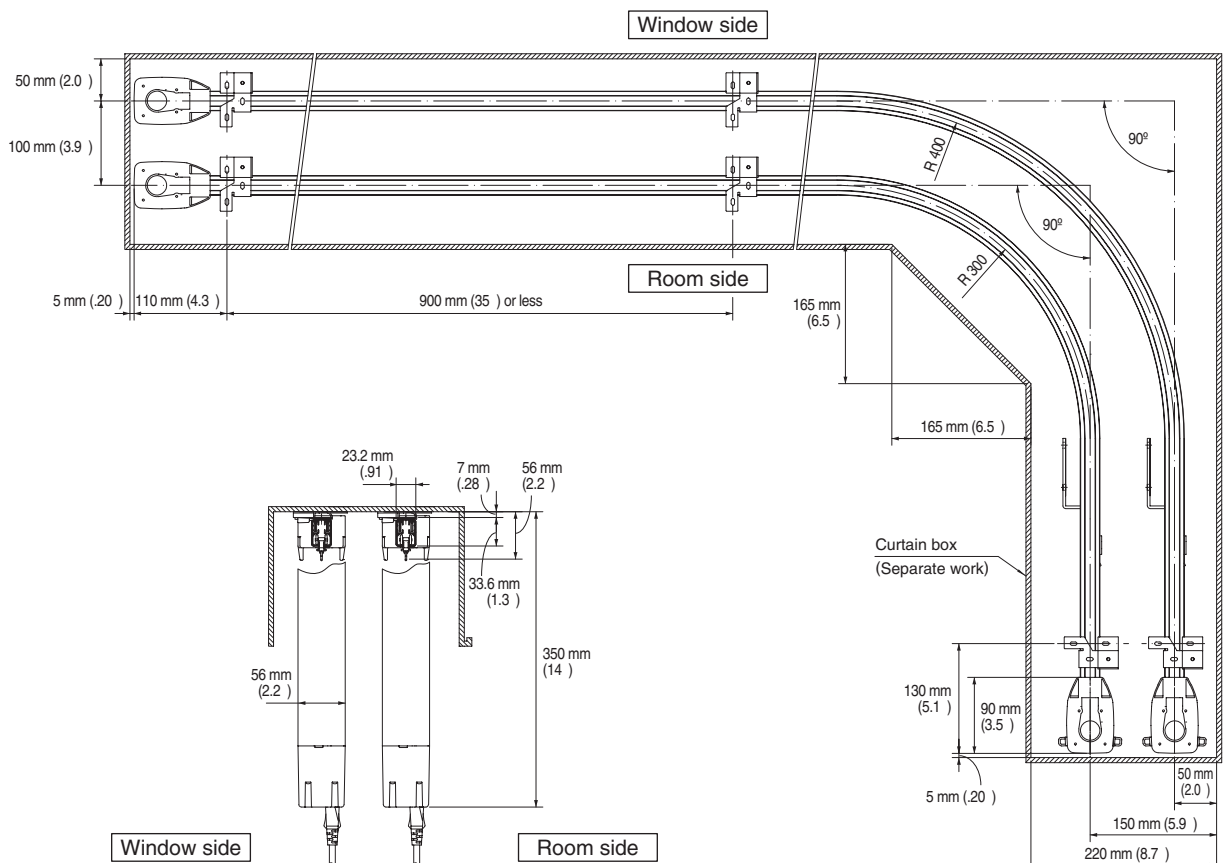


Two curves: ceiling single attachment

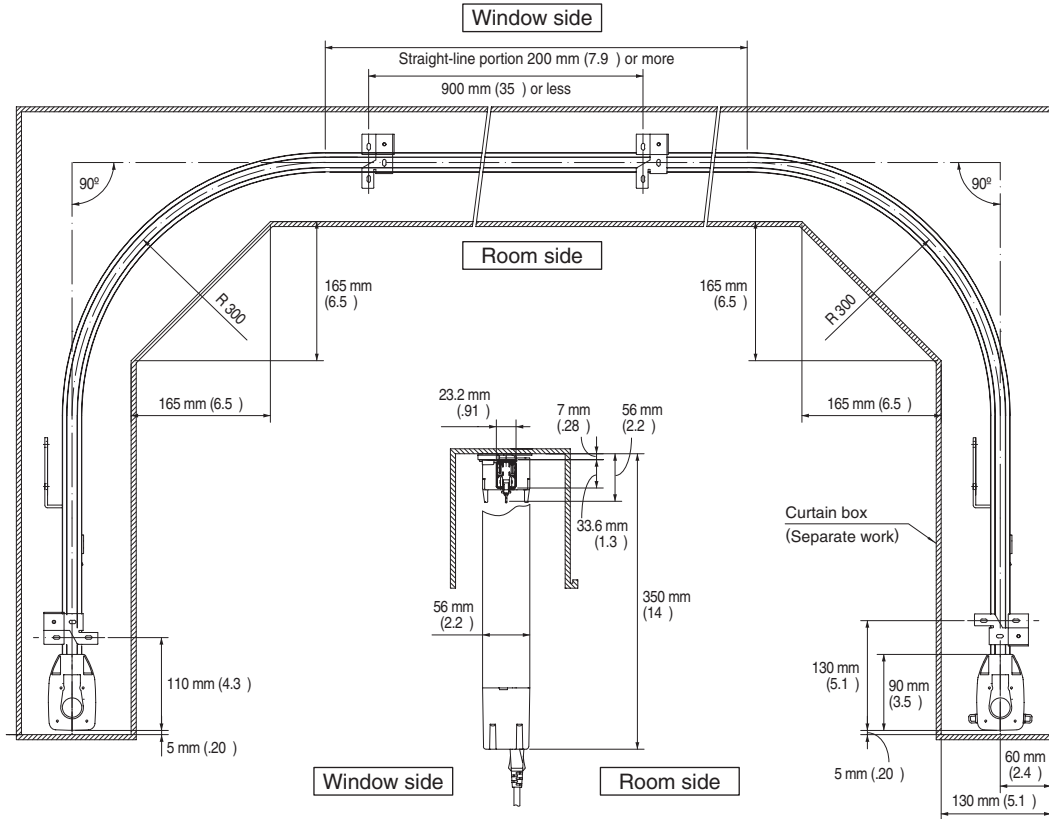


Two curves: ceiling single attachment
(Room side: Overlap with two rails, Window side: Master roller)

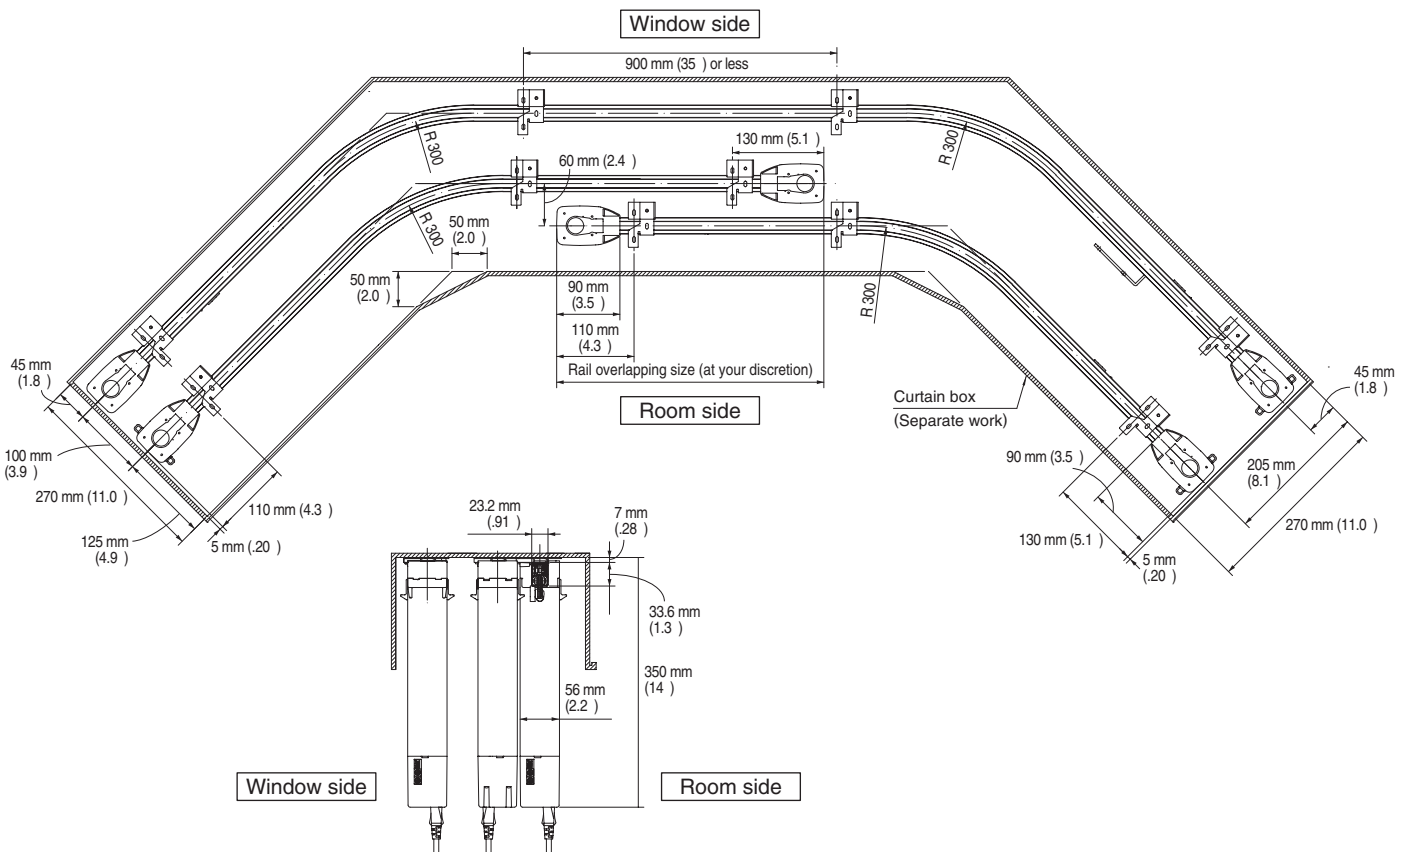


Two curves (S-shaped): ceiling single attachment

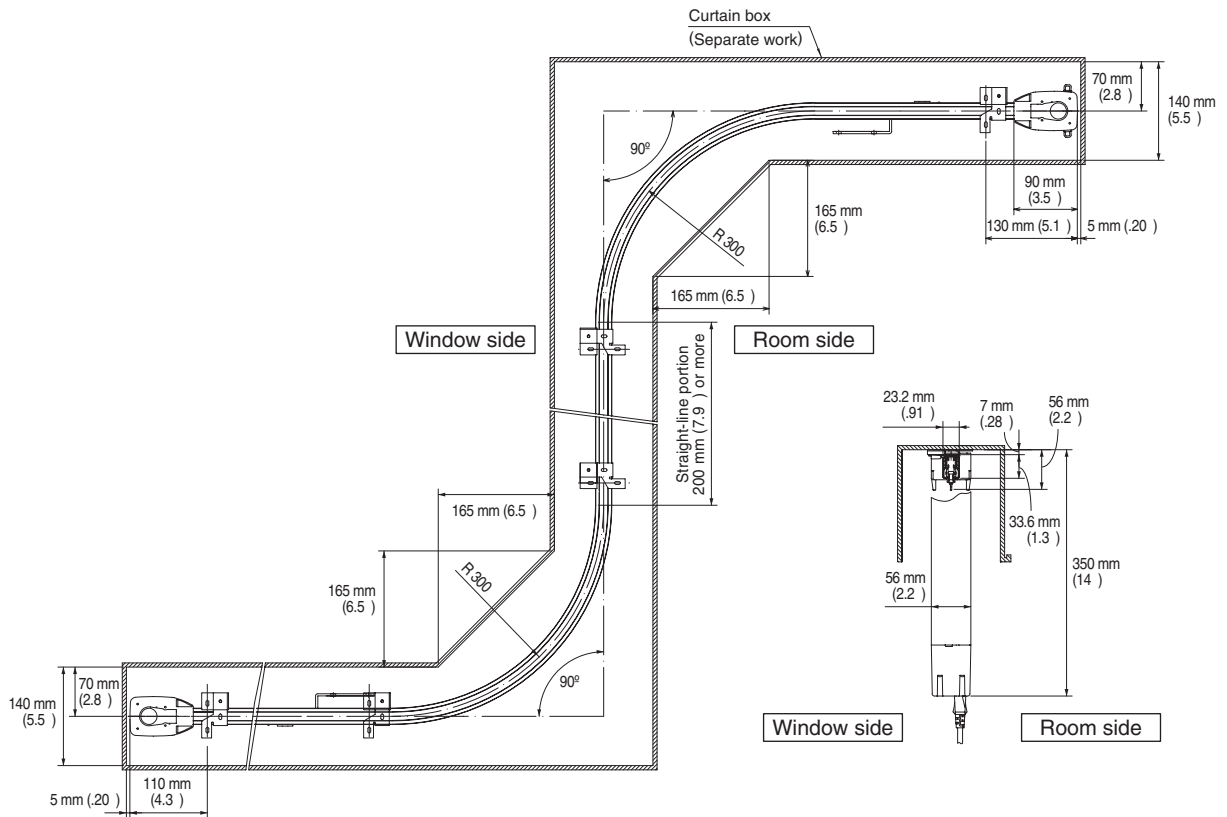

Overall curve: ceiling single attachment

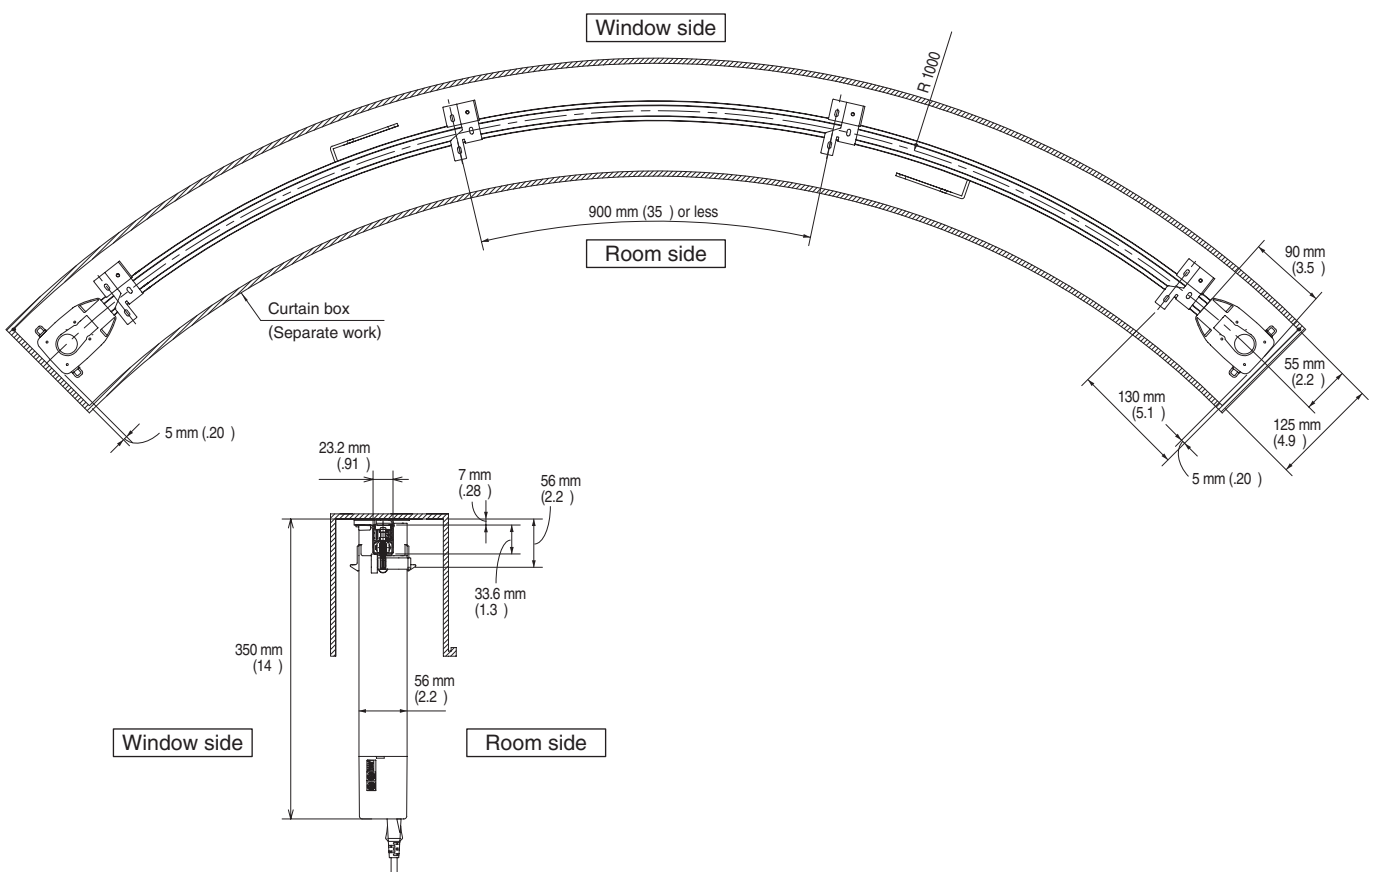


Overall curve half: ceiling double attachment
 (Room side: Overlap with two rails, Window side: Master roller)

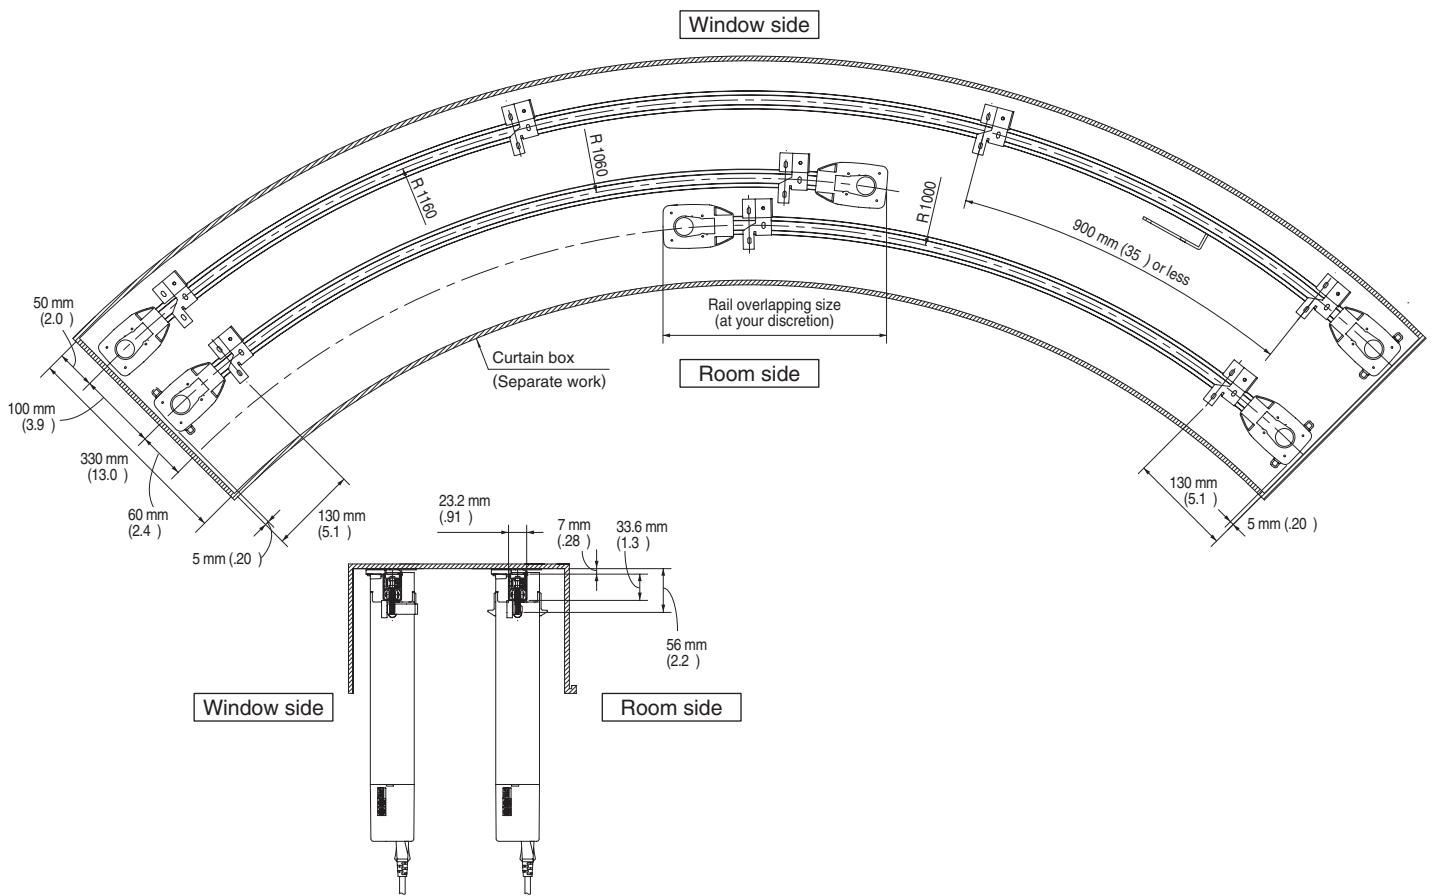


Basic Wiring and Connecting Diagram

Single Operation

Basic Wiring Diagram

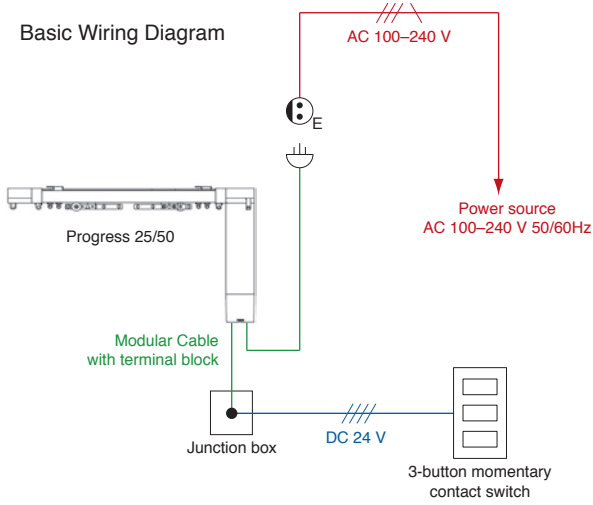


Basic Connecting Diagram

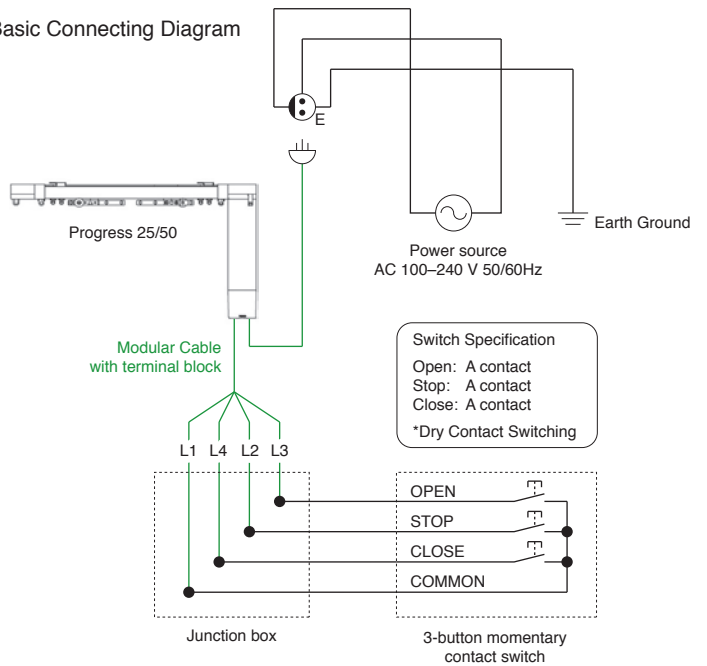


Operation from Two Locations

Basic Wiring Diagram

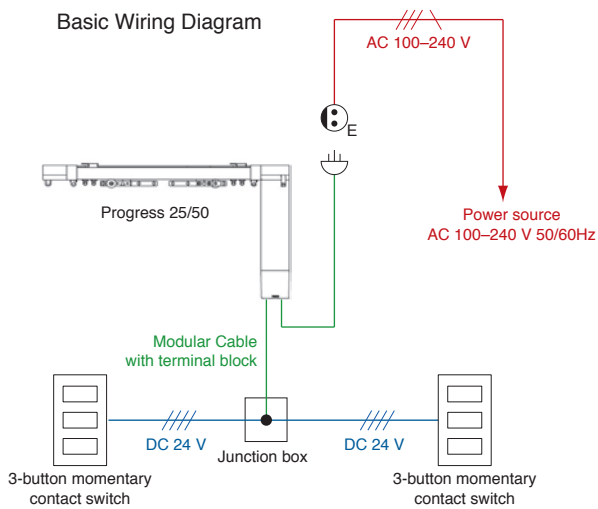


Basic Connecting Diagram

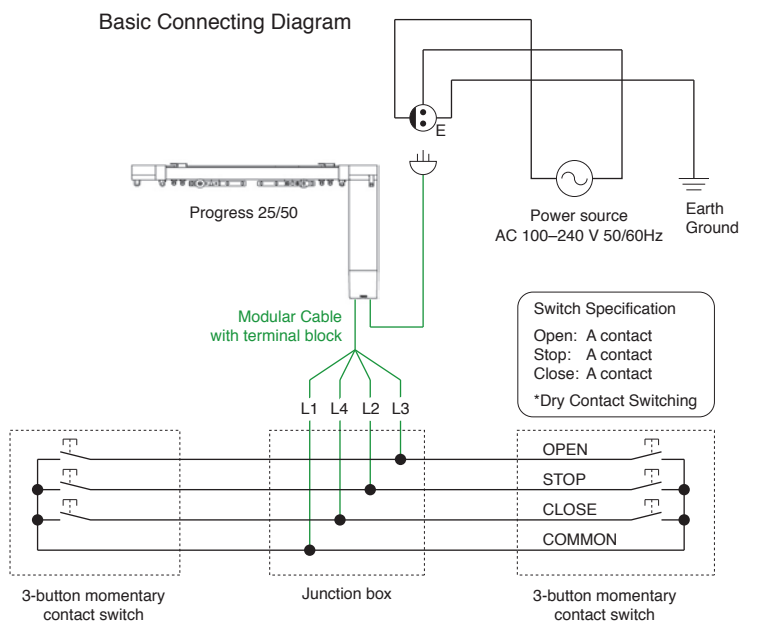


Explanatory notes: — Power supply, — Low voltage control line, — Main body attachment or TOSO standard

Simultaneous Operation

Basic Wiring Diagram

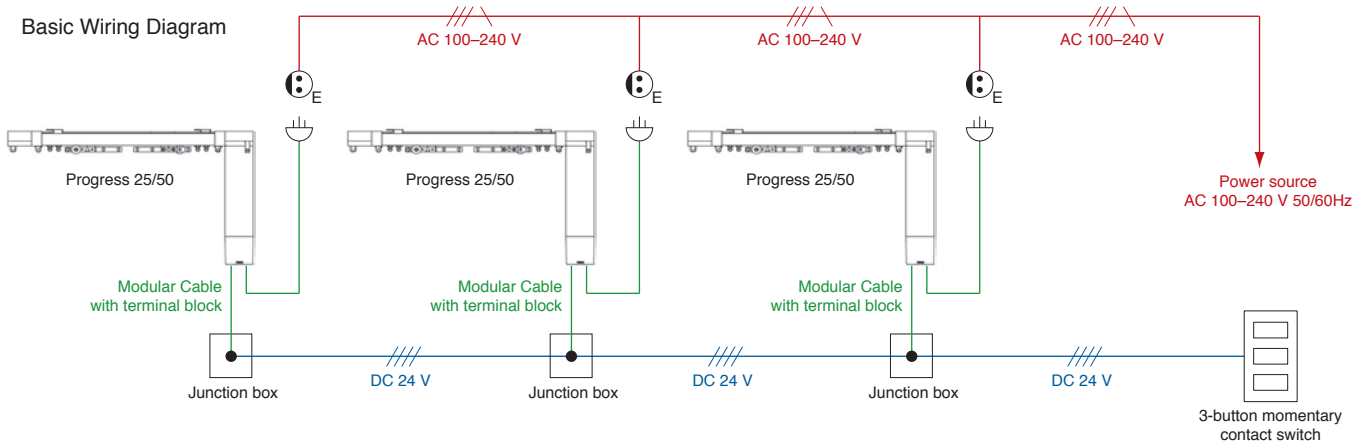


Basic Connecting Diagram

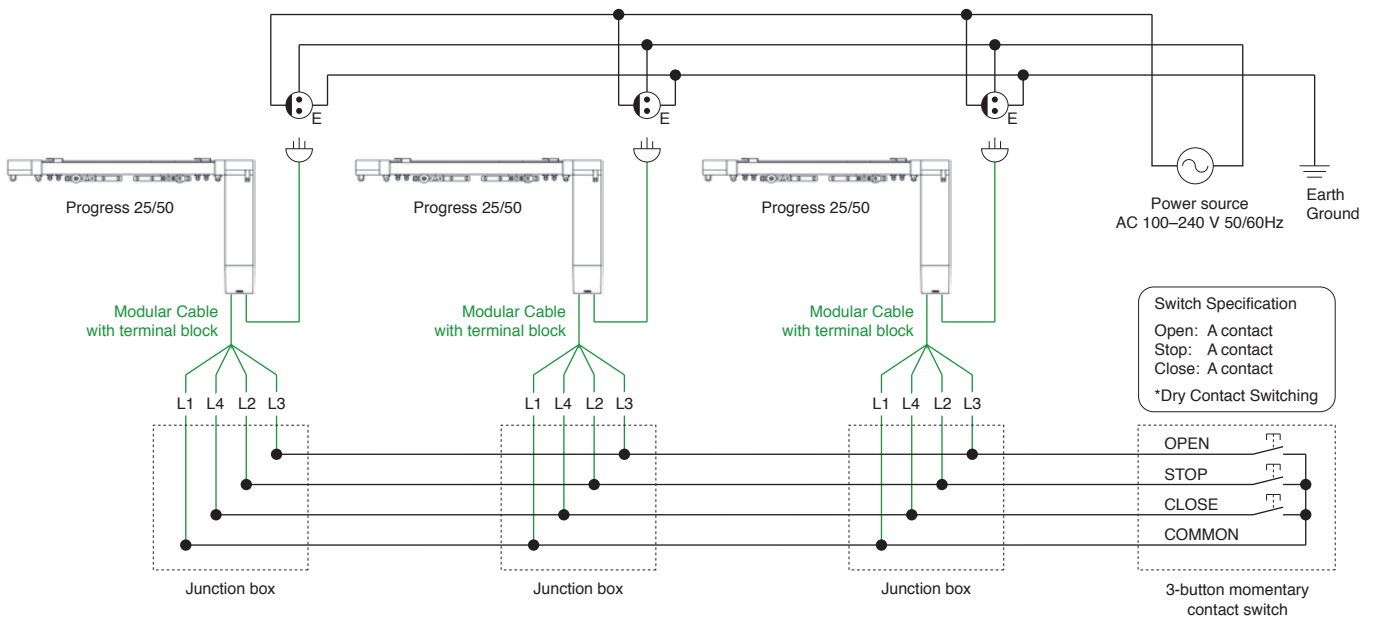


Simultaneous Operation for Select

Basic Wiring Diagram

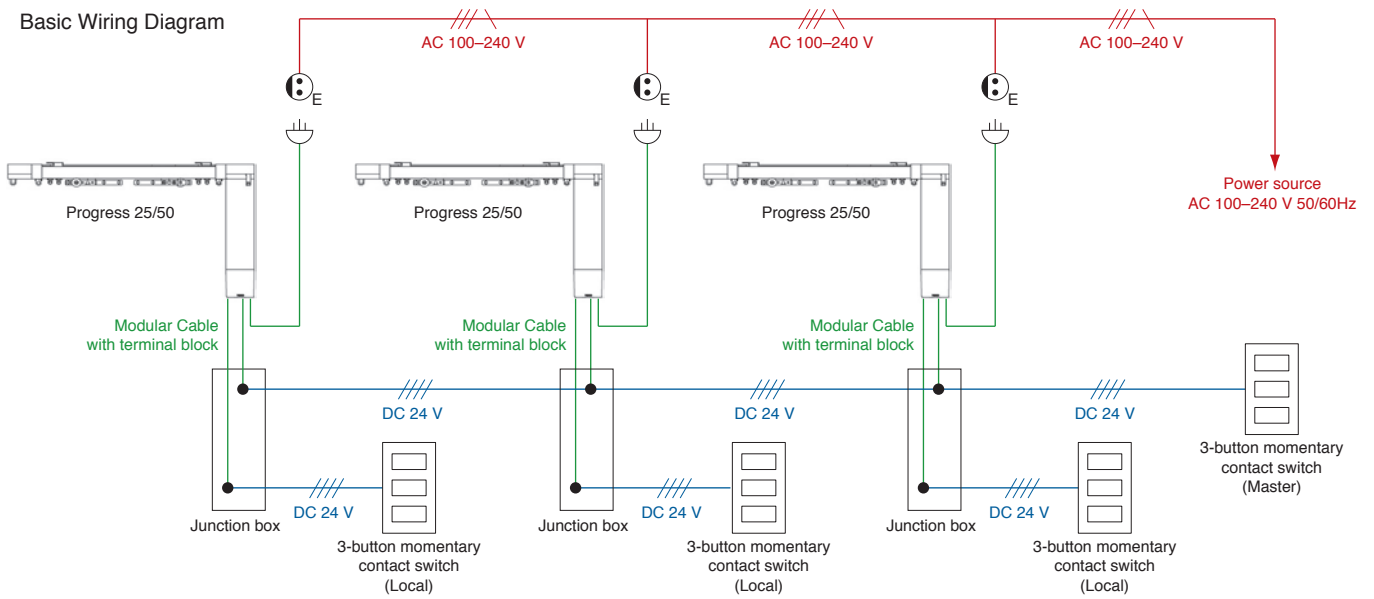


Basic Connecting Diagram

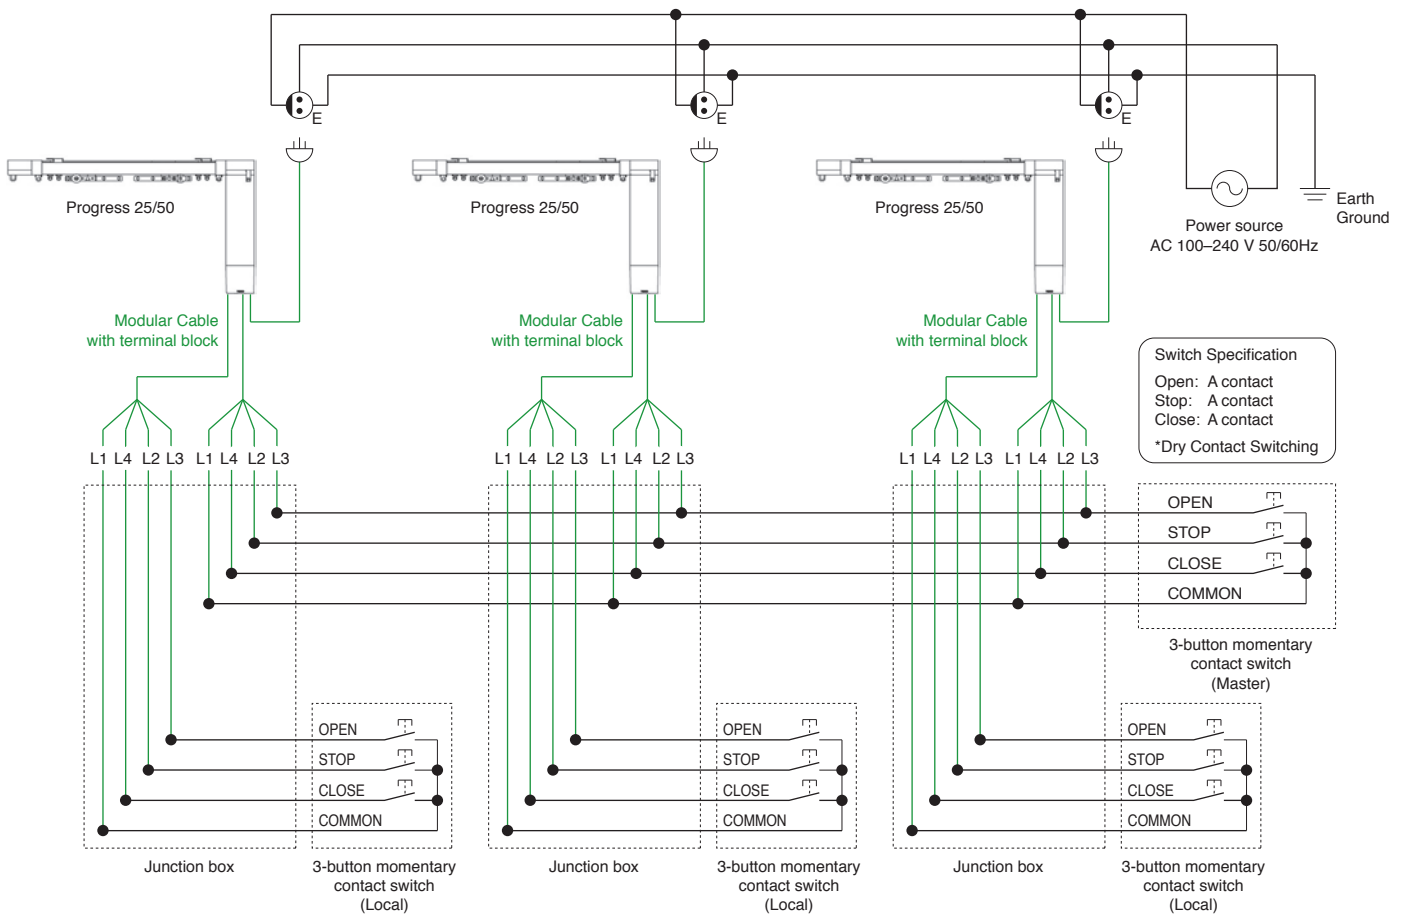


Explanatory notes: — Power supply, — Low voltage control line, — Main body attachment or TOSO standard

Infra-red Operations

Basic Wiring Diagram

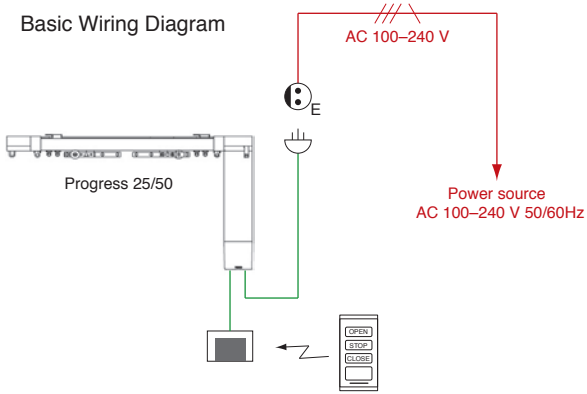


Basic Connecting Diagram

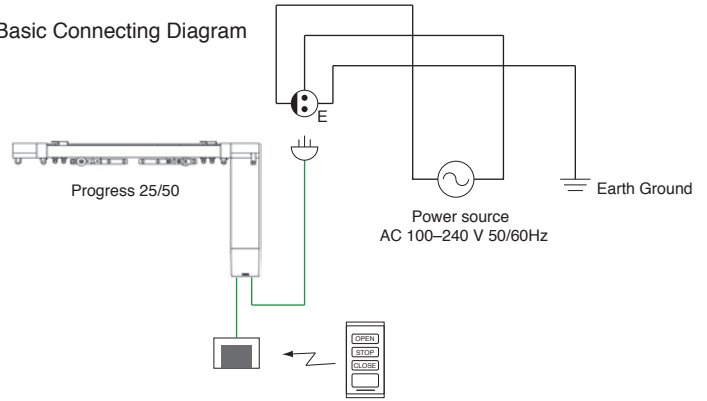


FM Remote-Control Receiver 2.4G with IR Terminal

Basic Wiring Diagram

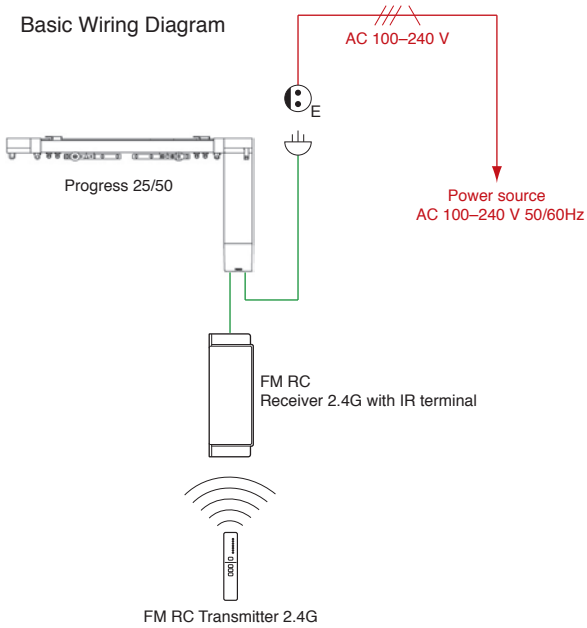

Basic Connecting Diagram

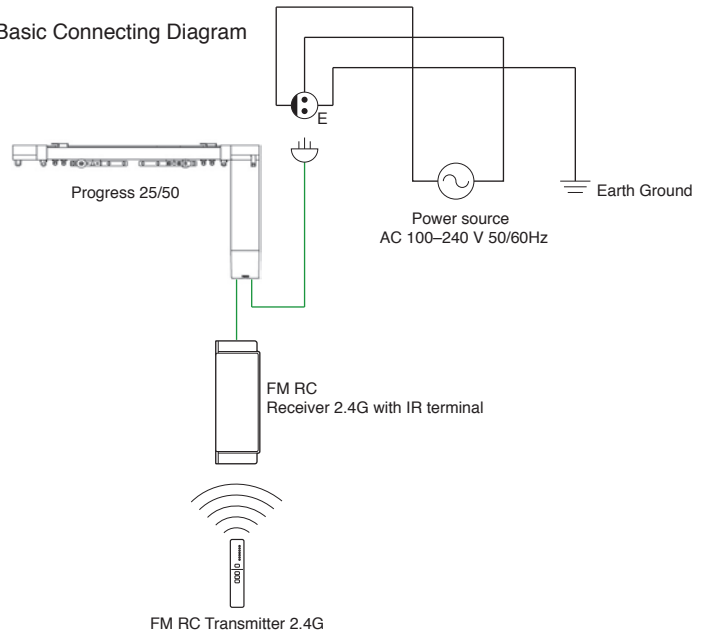

















Explanatory notes: — Power supply, — Main body attachment or TOSO standard

Progress 25/50 Rail

White Rail

Size	Product Code
5.00 m (197")	04990014

Progress 25/50 Parts

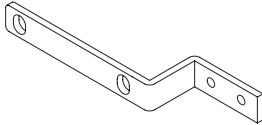Product Name	Product Code	Product Name	Product Code	Product Name	Product Code
Progress 50 Motor Set 	04990033	Progress 50 Stop 	04990022	Master Roller Arm 	04990012
Progress 25 Motor Set 	30001947	Ceiling Single Bracket M2 	01750038	Pilot Roller Plate with Wheel 	04990013
End Side Pulley 	04990015	Noiseless Roller 	04990006	Drive Belt 	04990008
Motor Side Pulley 	04990016	Pilot Roller 	04990007	Belt Joint 	04990009
		Joint Plate 	04990011	Belt Joint Cover 	04990010
				OT Splice 	04990020
				Splice Pin 	04990021

