


# Unity MG




Example of Using Unity MG Kit Silver

## Color

White

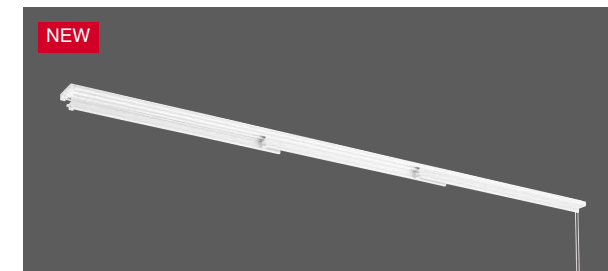


Silver

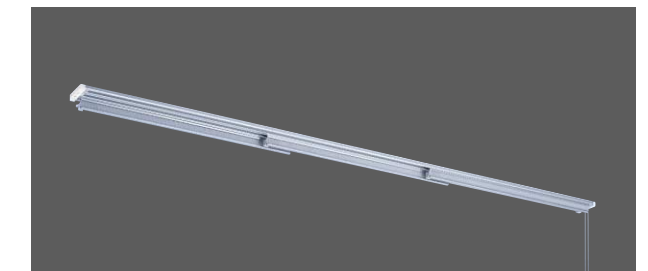


## Operation

Cord type

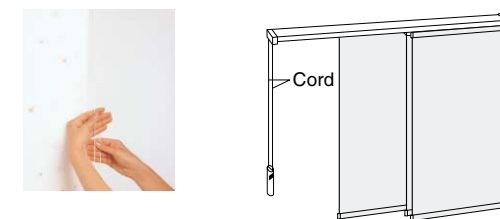

Operate Unity MG by drawing cord attached. \*Install Cord Hook and hang operational cord to keep it out of reach of children for safety.

Wand type

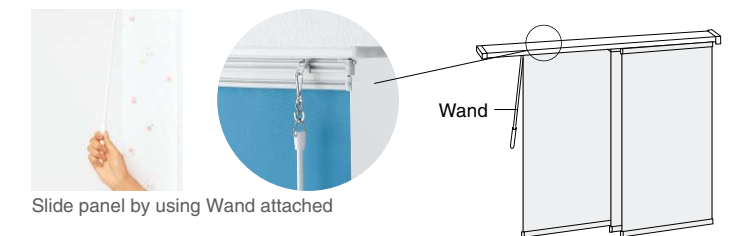

## Bottom Treatment

Wrapping Spec.



## Unity MG Kit Price Table

※ The price does not include the blind and sewing parts.

(in Yen)

No. of Panels \ Width(mm)	800-1,200	1,210-1,500	1,510-2,000	2,010-2,500	2,510-3,000	3,010-3,500	3,510-4,000	4,010-4,500	4,510-5,000
2Panels	10,000	10,000	13,000	16,000	19,000	21,000	—	—	—
3Panels	—	13,000	16,000	19,000	22,000	25,000	27,000	29,000	31,000
Panels	—	—	19,000	22,000	25,000	28,000	30,000	32,000	34,000
5Panels	—	—	22,000	25,000	28,000	31,000	33,000	35,000	37,000
6Panels	—	—	25,000	28,000	31,000	34,000	36,000	38,000	40,000


\*Height and width are in units of 10mm. \*Rails are available in white and silver. \*Cord operation is not available for two-panel style.

## Options


※ For the price and dimensions, see the page 199.

■ Ceiling attachment bracket

Color / White, Silver



For 2 tracks




For 3.4 tracks

■ Front attachment bracket

Color / White, Silver




For 2 tracks



For 3.4 tracks


■ Interlining Tape

Material: Polyester 100%



■ Velcro Tape(for fabric)

Material: Polyester 100%



The price does not include consumption tax and installation fee.

# Specifications and Structure

## Manufacturable Dimensions

Unity MG # of Panel (in mm)			Unity MG Kit # of Panel (in mm)		
	Blind count	Product width(W)		Blind count	Product width(W)
One Way Draw	2	800~1,500	One Way Draw	2	800~3,500
	3	1,510~2,000		3	1,210~5,000
	4	2,010~2,500		4 • 5 • 6	1,510~5,000
	5	2,510~3,000	Two Way Draw	4 • 6	1,510~5,000
	6	3,010~4,000			
Two Way Draw	4	2,010~3,000			
	6	3,010~4,000			

## Allowable load


Max 1 kg per panel (including sewing parts)

## Availability Table Avail.:available N/A:unavailable

Type Opening	Cord type						Wand type						
	One Way Draw			Two Way Draw			One Way Draw			Two Way Draw			
	Attach method	Ceiling Direct Attachment	Ceiling Bracket	Wall Bracket	Ceiling Direct Attachment	Ceiling Bracket	Wall Bracket	Ceiling Direct Attachment	Ceiling Bracket	Wall Bracket	Ceiling Direct Attachment	Ceiling Bracket	Wall Bracket
# of Panel													
2	N/A	N/A	N/A	N/A	N/A	N/A	Avail.	Avail.	Avail.	N/A	N/A	N/A	N/A
3	Avail.	Avail.	Avail.	N/A	N/A	N/A	Avail.	Avail.	Avail.	N/A	N/A	N/A	N/A
4	Avail.	Avail.	Avail.	Avail.	Avail.	Avail.	Avail.	Avail.	Avail.	Avail.	Avail.	Avail.	Avail.
5	Avail.	N/A	N/A	N/A	N/A	N/A	Avail.	N/A	N/A	N/A	N/A	N/A	N/A
6	Avail.	N/A	N/A	Avail.	Avail.	Avail.	Avail.	N/A	N/A	Avail.	Avail.	Avail.	Avail.

## Structure Drawings


### Cord Type

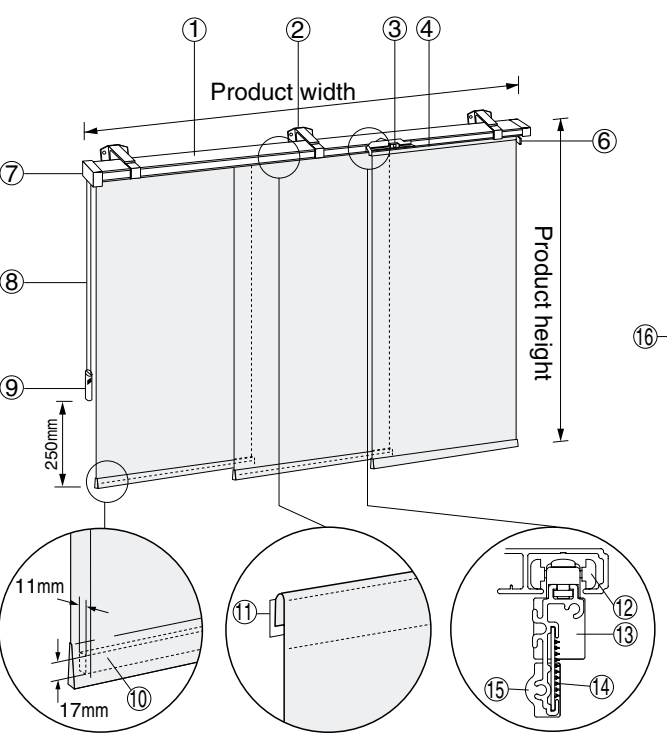

### Wand Type

Part Name	Material
① Track	Aluminum pressed
② Bracket ※option	Metal plate pressed, Resin
③ Pick-up	Resin molded
④ Slider Bar(MGS)	Aluminum pressed
⑤ Track Cap	Resin molded
⑥ Finger	Resin molded
⑦ Cord Guide	Resin molded
⑧ Cord	Chemical fabric
⑨ Weight	Resin molded, Steel
⑩ Wrapping Weight Bar	Aluminum pressed
⑪ Velcro Tape	Chemical fabric
⑫ Roller	Resin molded
⑬ Slider Bar Cap	Resin molded
⑭ Velcro Tape	Resin molded
⑮ Cap(MGS)	Resin molded
⑯ Wand	Resin molded

### Wrapping Type




For Cord Type: Operation cord Length=Installation height - 250mm

\*Unity MG Kit includes Cord Hook to prevent unexpected accidents by winging cord around body.  
\*Install Cord Hook and hang operational cord to keep it out of reach of children for safety


Installation height (mm)	Wand length (mm)
~2,200	700
~2,400	900
~2,600	1,200
~3,000	1,500

■Curtain Wand N  
White wand for white track, and Silver wand for silver track are included with Unity MG Kit Wand Type.

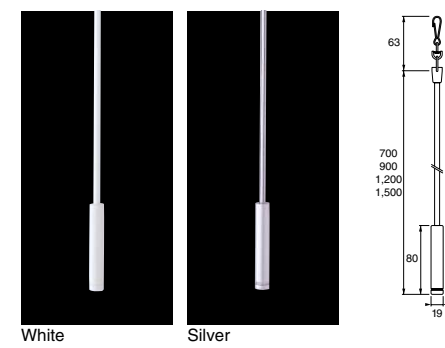


## Side View


### Ceiling Direct Attachment

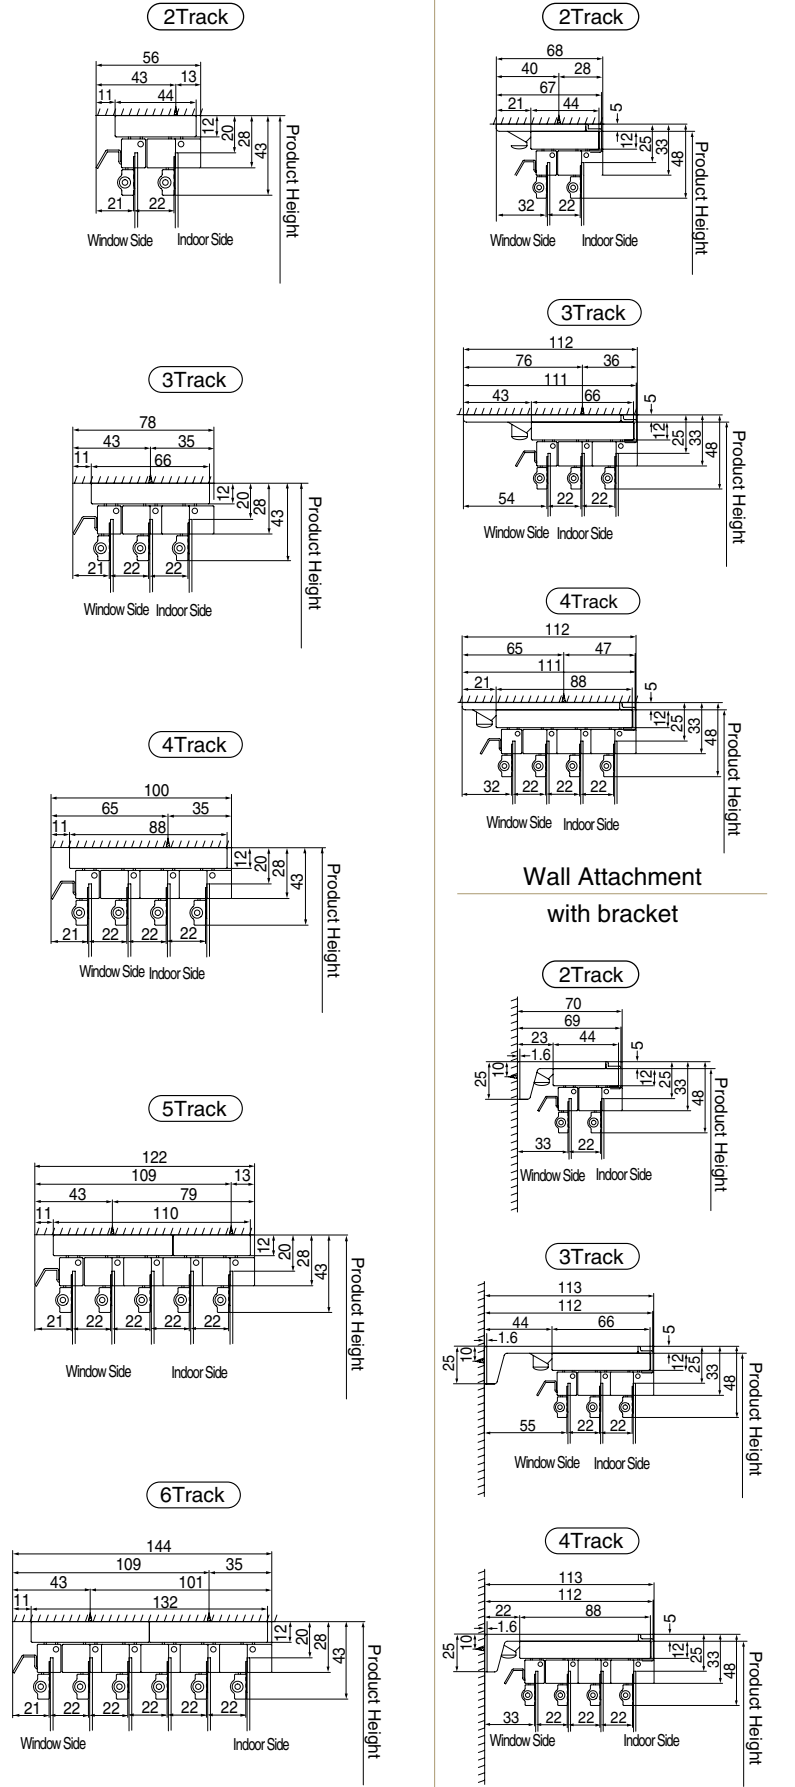

### Ceiling attachment with bracket

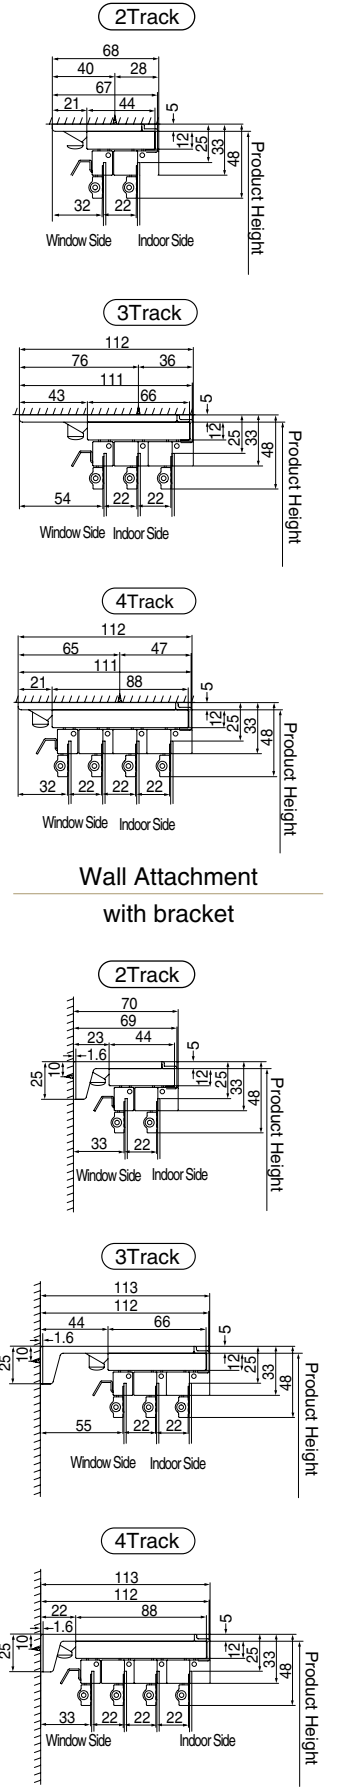


### Wall Attachment with bracket

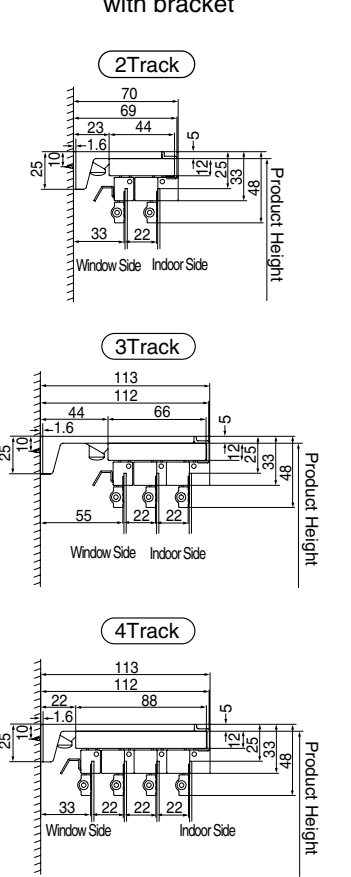


## Option

### Bracket

Bracket is for 2Track, 3Track, 4Track.  
Ceiling Bracket Color / White, Silver  
300 Yen per unit (2 bracket fixing screws (3.5x25) included)

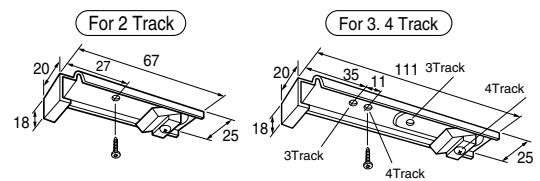


Wall Bracket color: White, Silver  
300 yen per unit (2 bracket fixing screws (3.5x25) included)

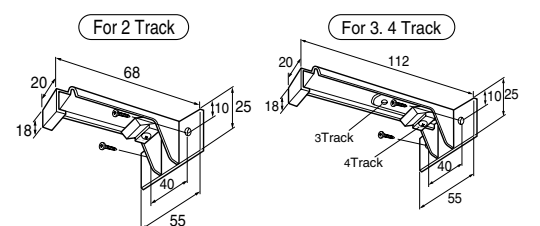


Product width(mm)	Number of brackets for 2 Track		Number of brackets for 3,4 Track	
	Part Name	Bracket for 2 Track	Part Name	Bracket for 3 4 Track
~1,100		2	~2,000	3
~2,000		3	~3,000	4
~3,000		4	~4,000	5
~3,500		5	~5,000	6

### Interlining Tape 30mm 1m/40 Yen

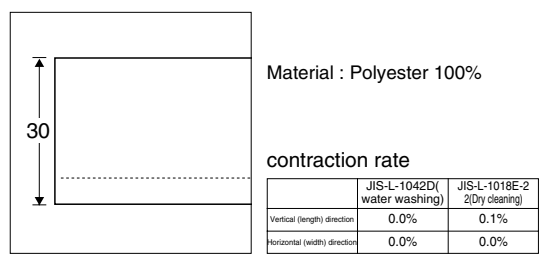

### Velcro Tape(for cloth and fabric) 1m/350 Yen

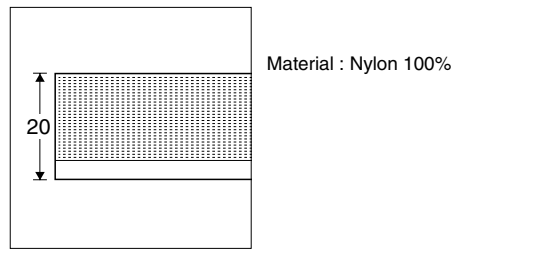




## Installation Method

### 1 Attach a track.


2 Track, 3 Track, and 4 Track are single rails. 5 Track and 6 Track require two rails that installed parallel. When installing 5 Track or 6 Track rails, place a rail with Unity Stop on indoor side.

#### Dired attachment to ceiling




#### Ceiling bracket attachment

For 2Track




For 3 • 4Track




#### Front Bracket attachment


For 2 Track



For 3 • 4Track




\*3, 4 Track Bracket is set for 4 Track use when shipped. If using for 3 Track rail, relocate a plastic part.




Place brackets apart within 50 - 100mm from rail ends, and in intervals of maximum 1,000m.


### 2 Attach the Velcro tape of Screen to the Velcro tape of slider bar.

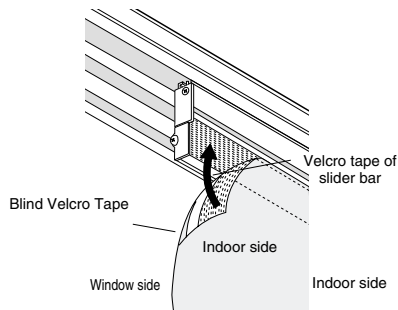

### 3 Insert a wrapping weight bar to a bottom pocket of a blind.




### 4 For a Wand type, set a wand to a Wand hook.

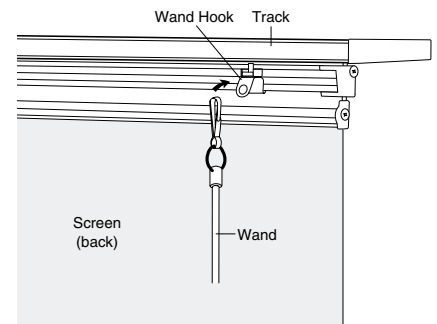


## Operating Method

### Cord type



Operate Unity MG by drawing cord attached.

### Wand type

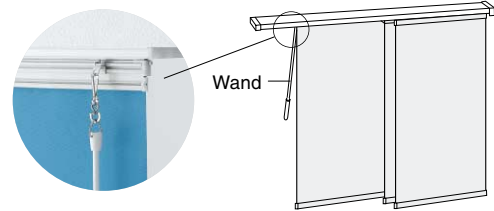


Operate Unity MG by using Wand attached.

\*Install Cord Hook and hang operational cord to keep it out of reach of children for safety.

## Measurement


### Installing inside of window frame (Ceiling attachment)

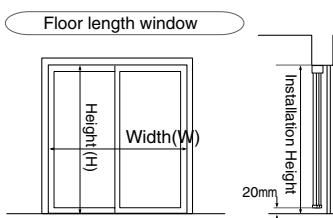

Width: Deduct 10mm from internal dimension of window frame.  
Height: Deduct 20mm from internal dimension of window frame.


\*Installation height does not include bracket thickness (5mm).

### Installing outside of window frame (Front attachment)

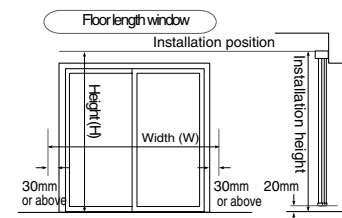

Width: Add 60mm to external dimension of window frame.  
Height: Deduct 20mm from installation height.

Finished Screen width is shorten by 26 - 44mm. When installing outside of window frame, make sure to specify product width by adding 60mm to measured frame dimension. Make sure to specify installation height as reference for wand length.

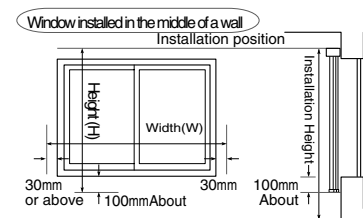

Width: Add 60mm to external dimension of window frame.  
Height: Add 100mm to height from bottom of window frame to installation position.